



K-con R32/Hybrid VRF System Solution


Hybrid VRF is a 2-pipe heat recovery VRF with water between the Hybrid Branch Controller (HBC) and the indoor units. With water at the indoor units, Hybrid VRF gives comfortable and stable air temperatures without the need for refrigerant in occupied spaces, meaning simple compliance to EN378 and removing the need for refrigerant leak detection.

KS8 HBC (Hybrid Branch Controller) valve modification

K-con offer a factory fitted and tested port isolation valve modification to the Mitsubishi Electric HBC and indoor ports. Isolation of individual ports and indoor units enables uninterrupted cooling and heating of the system whilst individual indoor units are serviced or maintained

- Suitable for office developments or refurbishiments
- Ideal for Hotel, retail or residential applications
- Easy maintenance, service and future expansion without the need to shut down the whole system ensures uninterrupted cooling and heating
- Quality assured Factory fitted and tested valve solution

Valves include isolation, ½" capped outlet for positioning of the Auto-Air Vent (flow), Fixed Drain-off Cock (return), 22mm capped copper stub. (Auto-Air Vents are supplied with the indoor unit valve kits).

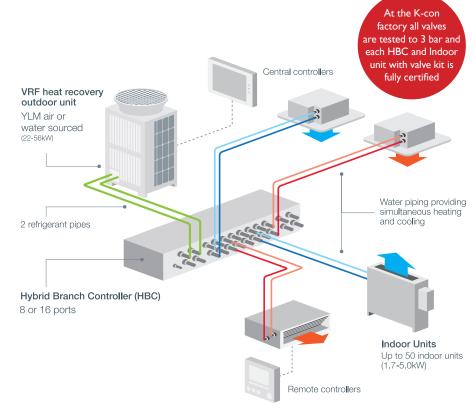



Mitshubishi Electric BC Controller Model No.	K-con Model (box and modification)	K-con Code
CMB-WM108V-AA	KS8-CMB-WM108V-AA Master	10101004 #3
CMB-WM1016V-AA	KS8-CMB-WM1016V-AA Master	10101005 #3
CMB-WM108V-AB	KS8-CMB-WM108V-AB Slave	10101006 #3
CMB-WM1016V-AB	KS8-CMB-WM1016V-AB Slave	10101007 #3







KS8 HBC indoor assembled valve kits


Each kit includes both a flow and a return valve. Valves include isolation, ½" capped outlet (flow) for positioning of Auto-Air Vent, fixed Drain-off Cock (return). Auto-Air Vents are included separate to position on the indoor or the HBC flow valve. Finished with 3/4" or 11/4" female connection to suit pressfit pipework.

Model	Full Description	K-con Code
KS8 ¾" HBC Valve Kit	KS8 ³ / ₄ " HBC Valve Kit Assy inc. Auto-Air vent	10100978#1
KS8 11/4" HBC Valve Kit	KS8 11/4" HBC Valve Kit Assy inc. Auto-Air vent	10100979#1




MULTIPIPE

Multi-layered composite pipe and press-fit for Hybrid VRF combining the benefits of both plastic and metal pipes



- 5 layers combining the benefits of plastic and metal pipes
- 100% Oxygen barrier Aluminium barrier safeguards against oxygen penetration
- Low heat expansion (up to 10x less than plastic systems)



- Installation times reduced
- U-profile press jaws, fully compatible with alternative systems
- Secure double press

Fast, simple and effective piping solutions

Kooltech also offer a full range of braze-free Multi-layered Composite Press-Fit pipe-work systems, expansion vessels and water filling components designed to meet Mitsubishi Electric specifications. Traditional brazing of copper pipework and fittings is not recommended for this application due to the risk of system contamination.

MLC Press Fit-Multi layered composite pipe with aluminium barrier (BSEN/ISO 21003)

Key Benefits:

- Available in 50m coils reducing the number of joints and improving productivity.
- Press-fit, no hot works or brazing required.
- Inspection windows on fittings visual check to ensure correct application.
- Light weight for easy handling and transportation.
- Formstable pipework holds its shape once formed.
- Full training with certification will be provided nationally.
- 25 year guarantee (50 years on application).

For more information on Hybrid VRF installation materials contact us.

Let's start a new project together...

SCOTLAND PROJECTS Tel: 0345 034 4181 Email: scotlandprojects@kooltech.co.uk

NORTHERN PROJECTS Tel: 0345 034 4182 Email: northernprojects@kooltech.co.uk

SOUTHERN PROJECTS Tel: 0345 034 4183 Email: southernprojects@kooltech.co.uk